
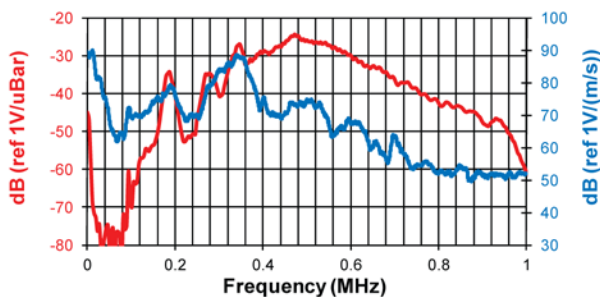



PRODUCT DATA SHEET

R50I-AST Sensor

Integral Preamp Sensor



DESCRIPTION AND FEATURES

PAC's integral preamp sensors were specifically engineered to attain high sensitivity and have the capability to drive long cables without the need for a separate preamplifier. Incorporating a low-noise input, 40 dB preamplifier and a filter all inside the sensor housing, these transducers are completely enclosed in metal stainless steel (or aluminum) housings that are treated to minimize RFI/EMI interference. Care has also been taken to thermally isolate the critical input stage of the preamplifier in order to provide excellent temperature stability over the range of -35° to 75° C.

Their integrated Auto Sensor Test (AST*) capability allows these sensors to pulse as well as receive. This feature lets you verify the sensor coupling and performance at any time throughout the test.

APPLICATIONS

This sensor is useful in very noisy plant and process monitoring applications and is particularly well suited to such applications as welding monitoring and control.

OPERATING SPECIFICATIONS

Dynamic

Peak Sensitivity, Ref V/(m/s).....	88 dB
Peak Sensitivity, Ref V/µbar.....	-26 dB
Operating Frequency Range.....	300-550 kHz
Resonant Frequency, Ref V/(m/s).....	320 kHz
Resonant Frequency, Ref V/µbar.....	500 kHz
Directionality.....	+/-1.5 dB

Environmental

Temperature Range.....	-35 to 75°C
Shock Limit.....	500 g
Completely enclosed crystal for RFI/EMI immunity	

Physical

Dimensions.....	1.125"OD X 1.25"H 29 mm OD X 32 mm H
Weight.....	70 grams
Case Material.....	Stainless Steel (304)
Face Material.....	Ceramic
Connector.....	BNC
Connector Locations.....	Side

Electrical

Gain.....	40 dB
Power Requirements.....	20-30 VDC @ 25 mA
Dynamic Range.....	> 87 dB
Noise Level (RMS RTI).....	< 3 µV
Output Drive Impedance.....	50 Ω
Grounding.....	Case Grounding, Isolated from mounting surface

ORDERING INFORMATION AND ACCESSORIES

R50I-AST	R50I-AST
Cable (specify length in 'XX' m at end of PN)	1234 - X
Magnetic Hold-Down	MHR50I
Amplifier Subsystems	AE2A, AE5A

Sensors include

NIST Calibration Certificate & Warranty

* AST — Auto Sensor Testing feature allows AE systems to control the sensor as a pulser and a receiver at the same time. It can therefore characterize its own condition as well as send out a simulated acoustic emission wave that other sensors can detect, so the condition of the nearby sensors also can be tested.

